


Proposed design for indirect lighting in great room &cetera.

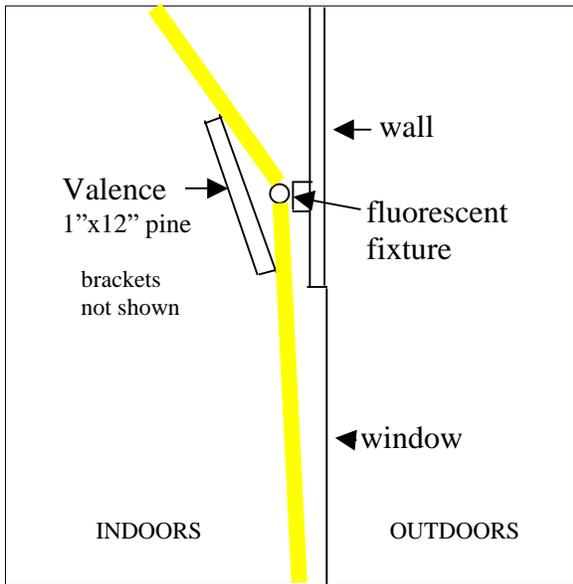

The valence should be placed so that most of the light shines up on the ceiling, and so that the bulb is not visible directly except from directly below the fixture. The back side should be painted white. Brackets can be made of 1x8 or 1x10 pine and placed between the four foot long fluorescent fixtures.

This document was created with Win2PDF available at <http://www.daneprairie.com>.
The unregistered version of Win2PDF is for evaluation or non-commercial use only.